BRASS SPRING CHECK VALVE



Product Description

TVN V704 spring-loaded check valve is used in tank systems to prevent backflow contamination. These are great for tank systems that are linked with mains water. Brass inline spring check valves are commonly used to prevent backflow contamination for through pressure pipes in a variety of applications.

A possible application where a brass inline spring check valve could be used is where there is a tank system linked with mains water that must be prevented from becoming contaminated. Brass inline spring check valves are suitable to both residential and industrial applications. The check valve includes female connections.





Technical Data				
Size range	DN15 - DN50			
Pressure range	PN10 - 16 - 25			
Temperature	-10°C to +110 °C			
Connection	Threaded EN ISO 228-1			
Testing	EN 12266 - 1			
Marking	EN 19			

Application Range

- Housing heating & cooling applications
- City water network
- Hot water and compressed air installations
- Steam
- Compressed air installations

Related Products

- V701 Brass Ball Valve
- V702 Brass Strainer
- V703 Brass Swing Check Valve
- V705 Brass Gate Valve


















BRASS BALL VALVE



Material List & Dimensions Table

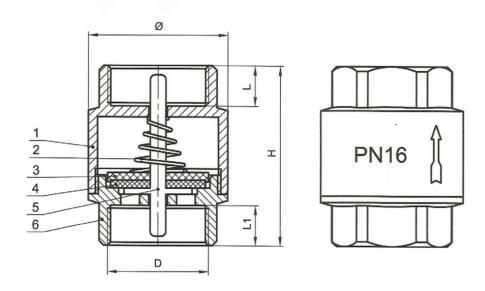

No	Part	Material		
1	Body	CuZn40Pb2 /CW617N Forged Brass		
2	Spring	X12CrNi18 8 / AISI302 Stainless Steel		
3	Washer	ABS		
4	Washer	NBR		
5	Stopcock	ABS		
6	Bonnet	CuZn40Pb2 /CW617N Forged Brass		

Ø(mm)	D	L	L1	Н	DN
33	1/2″	12.5	12	45	15
40	3/4"	14	14	49	20
45.5	1″	14.5	12.5	56.5	25
57.5	1 1/4"	17.5	16	60	32
64.5	1 ½"	18	17	70.5	40
80	2"	20	17.5	75.5	50